


Removing a charger dock (To connect a replacement charger dock see other side of this sheet)


Open case and remove tool bag

Hold lid open

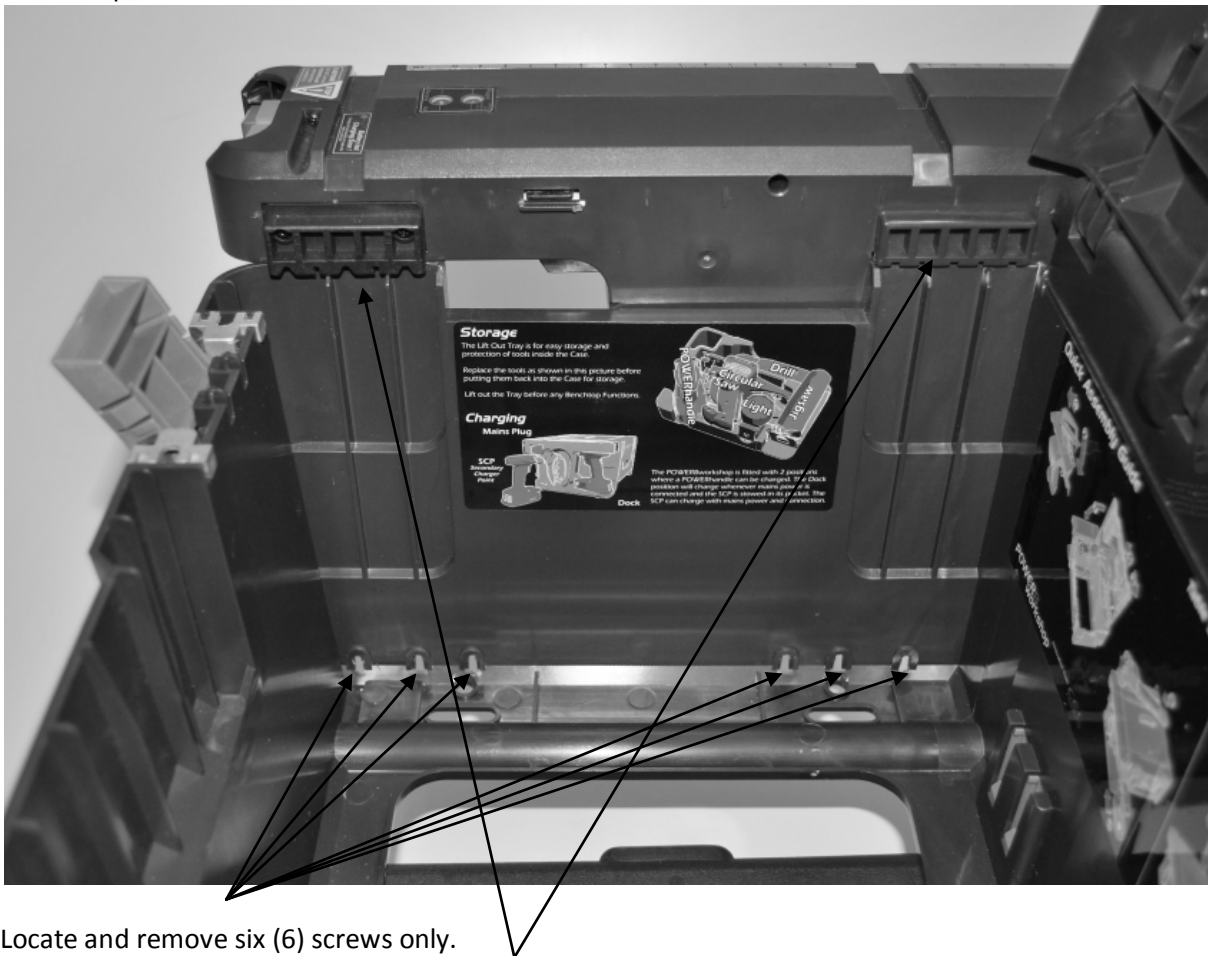

Locate and remove six (6) screws only.

Lift the charger dock up to release the hooks.

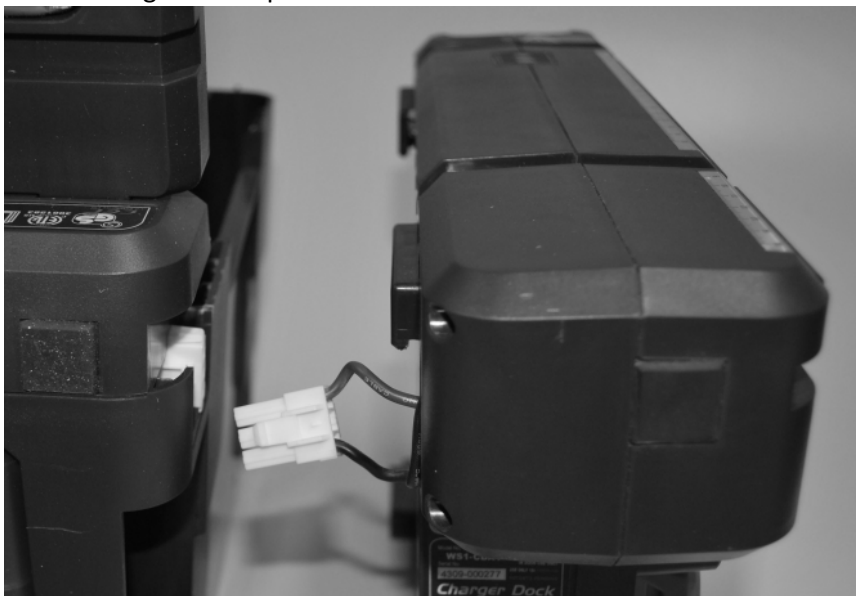

Disconnect this white plug and remove charger dock.

Fitting a charger dock (To remove a charger dock see other side of this sheet .)

Open case and remove tool bag

Hold lid open



Connect this white plug on dock to matching plug on case.

Lower the charger dock onto the case so these hooks hold it in place.



Fit and secure six (6) screws at these locations.